



HANDHELD LIGHTING

HIGH OUTPUT LIGHTING

ADAPTS.
MILWAUKEE® High Output lights offer professionals the ability to bring light directly to their work as well as control beam intensity and direction for greater productivity on the jobsite.

PERFORMS.
Through the use of TRUEVIEW™ LEDs and REDLITHIUM™ Batteries, MILWAUKEE® High Output lights shine brighter and last longer.

SURVIVES.
Reinforced, impact resistant housings and lenses stand up to the challenges of industrial use, while superior temperature management protects LEDs throughout their lifetime.



M12

NUMBER 1 SUBCOMPACT SYSTEM ON THE MARKET



M18

PERFORMANCE DRIVEN TRADE FOCUSED SYSTEM WIDE



milwaukeetool.com/lighting

SPECIALTY LIGHTING



HIGH OUTPUT LIGHTING

QUICK REFERENCE



M12™ LED Underhood Light Kit

2125-21XC (2125-20 Tool-Only)

Specifications:

Modes	High, Low
Lumens	1,350 / 600
Run-Time (XC4.0)	4 hr / 8 hr
Hands Free	FINISHGUARD™ Hooks Protect Against Scratches
Moisture Resistance	IP54

Includes: (1) M12™ REDLITHIUM™ XC4.0 Extended Capacity Battery Pack, M12™ Charger



M12

M18™ LED Utility Bucket Light Kit

2122-22HD, 2122-21HD (2122-20 Tool-Only)

Specifications:

Modes	Flood, Spot/Flood, Spot
Lumens	2,500 / 2,200 / 800
Run-Time (HD9.0)	4 hr / 4 hr / 6 hr
Beam Distance	Over 500 Yards
Hands Free	Patented Spring Loaded Bucket Clamp
Dual Heads	180° of Vertical & Horizontal Rotation
Moisture Resistance	IP56

Includes: 2122-22HD (2) M18™ REDLITHIUM™ HIGH DEMAND™ 9.0 Battery Packs, Rapid Charger, Storage Bag; 2122-21HD Includes (1) M18™ REDLITHIUM™ HIGH DEMAND™ 9.0 Battery Pack

M18

M18™ LED Search Light Kit

2354-21 (2354-20 Tool-Only)

Specifications:

Modes	Spot/Flood, Flood, Spot, Strobe
Lumens	1,250 / 1,200 / 600 / 1,200
Run-Time (XC5.0)	4 hr / 4 hr / 7 hr / 5 hr
Beam Distance	730 yd / 667.5 m
Moisture Resistance	IP54
Head Rotation	198°

Includes: (1) M18™ REDLITHIUM™ XC5.0 Extended Capacity Battery Pack, Multi-Voltage Charger, Shoulder Strap



M18

M18™ LED Lantern/Flood Light

2363-20

Specifications:

Modes	High, Medium, Low, Strobe
Lumens	700 / 350 / 70 / 700
Run-Time (XC5.0)	10 hr / 20 hr / 100 hr / 16 hr
Beam Pattern	Adjustable 180° – 360°
Moisture Resistance	IP54
Hands Free	Stainless Steel Hook
USB Charger	2.1A USB Charging Port



Battery and Charger Sold Separately

M18

M12™ LED Lantern/Flood Light

2362-20

Specifications:

Modes	High, Medium, Low, Strobe
Lumens	400 / 200 / 40 / 400
Run-Time (XC4.0)	8 hr / 15 hr / 67 hr / 16 hr
Beam Pattern	Adjustable 180° – 360°
Moisture Resistance	IP54
Hands-Free	Stainless Steel Hook
USB Charger	2.1A USB Charging Port



Battery and Charger Sold Separately

M12

M12™ LED Spot Light

2353-20

Specifications:

Modes	High, Low, Strobe
Lumens	750 / 400 / 750
Run-Time (XC4.0)	4 hr / 8 hr / 8 hr
Beam Distance	700 yd / 640 m
Moisture Resistance	IP54



Battery and Charger Sold Separately

Includes: Lanyard

M12

M18™ LED Stick Light

2352-20

Specifications:

Modes	High, Low
Lumens	300 / 150
Run-Time (XC5.0)	17 hr / 36 hr
Moisture Resistance	IP54
Pivoting Head	45°
Hands Free	Pivoting Head & Multi-Position Hook Stainless Steel Hook



Battery and Charger Sold Separately

M18

M12™ LED Stick Light

2351-20

Specifications:

Lumens	220
Run-Time (XC4.0)	11 hr
Hands-Free	Multi-Position Stainless Steel Hook
Moisture Resistance	IP54



Battery and Charger Sold Separately

Related Accessory:
49-24-2351 M12™ Stick Light Magnet
Holds light to metal surfaces for hands-free use

M12

M12™ LED Metal Flashlight Kit

2355-21 (2355-20 Tool-Only)

Specifications:

Modes	High, Low, Strobe
Lumens	800 / 325 / 800
Run-Time (XC4.0)	5 hr / 7 hr / 7 hr
Beam Distance	375 yd / 343 m
Beam Focus	Spot-Flood Sliding Beam Adjustment
Moisture Resistance	IP54
Structure	6000 Series Aluminum, Type II Anodize Finish



Includes: (1) M12™ REDLITHIUM™ Compact Battery Pack, Lanyard, Charger

M12

M18™ LED Work Light

2735-20

Specifications:

Lumens	100
Run-Time (XC5.0)	29 hr
Hands Free	Integrated Hook
Head Rotation	90°



Battery and Charger Sold Separately

M18

M12™ LED Work Light

49-24-0146

Specifications:

Lumens	100
Run-Time (XC4.0)	15 hr
Hands-Free	Integrated Magnet
Head Rotation	90°



Battery and Charger Sold Separately

M12

ADAPTS. PERFORMS. SURVIVES.

ROVER™

FLOOD LIGHTS



M18™ ROVER™ LED Flood Light

2361-20

Specifications:

Modes	High, Low
Lumens	1,500 / 780
Run-Time (XC5.0)	5 hr / 10 hr
Moisture Resistance	IP54
Hands-Free	(1) Keyhole for Hanging, (1) EMT Hanger

Battery and Charger Sold Separately




M18™ ROVER™ LED Mounting Flood Light

2365-20

Specifications:

Modes	High, Medium, Low
Lumens	1,500 / 650 / 300
Run-Time (XC5.0)	4.5 hr / 10 hr / 20 hr
Rotating Head	Yes
Hands Free	Integrated Magnet, Spring Loaded Clamp
Moisture Resistance	IP54

Battery and Charger Sold Separately

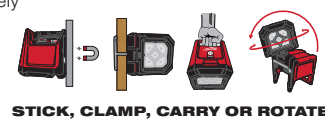

M18™ ROVER™ LED Dual Power Flood Light

2360-20

Specifications:

Modes	High, Medium, Low
Lumens	3,000 / 1,500 / 650
Run-Time (XC5.0)	2 hr / 4 hr / 9 hr
Powered By	M18™ or Corded
Hands Free	(3) Keyholes for Hanging

Battery and Charger Sold Separately



M12™ ROVER™ LED Flood Light

2364-20

Specifications:


Modes	High, Medium, Low
Lumens	1,000 / 400 / 200
Run-Time (XC4.0)	3.5 hr / 7.5 hr / 15 hr
Hands Free	Integrated Magnet, Spring Loaded Clamp
Moisture Resistance	IP54

Battery and Charger Sold Separately



RADIUS™

SITE LIGHTS

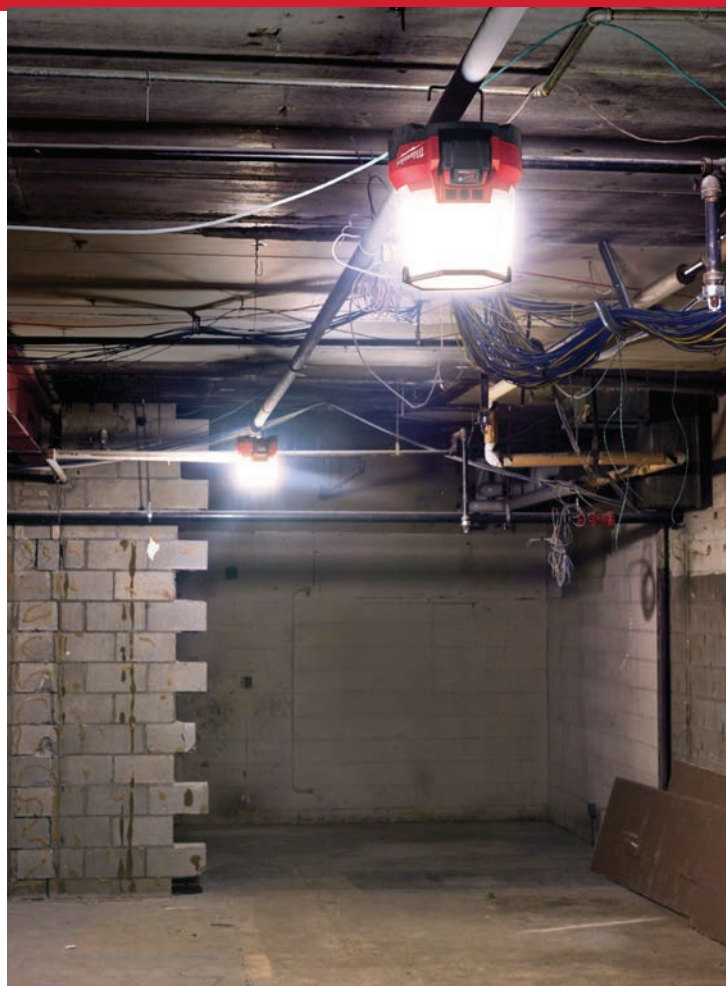

M18™ RADIUS™ LED Compact Site Light w/ ONE-KEY™

2146-20

Specifications:

Modes	High, Medium, Low
Lumens	4,400 / 2,100 / 1,000 (Customizable)
Run-Time (XC5.0)	2 hr / 4 hr / 8 hr
Moisture Resistance	IP54
Powered By	M18™ or Corded
Hands Free	Self-Centering Metal Hook
Daisy Chain Compatible	Yes

Battery and Charger Sold Separately **Includes:** Security Cable



M18™ RADIUS™ LED Site Light

2151-20

Specifications:

Modes	High, Medium, Low
Lumens	9,000 / 4,800 / 2,500
Run-Time (2X HD9.0)	3.5 hr / 7 hr / 14 hr
Powered By	1 or 2 M18™ Batteries or Corded
Daisy Chain Compatible	Yes

Battery and Charger Sold Separately



M18™ RADIUS™ LED Site Light/Charger w/ ONE-KEY™

2150-20

Specifications:

Modes	High, Medium, Low
Lumens	9,000 / 4,800 / 2,500 (Customizable)
Run-Time (2X HD9.0)	3.5 hr / 7 hr / 14 hr
Moisture Resistance	IP54
Powered By	1 or 2 M18™ Batteries or Corded
Integrated Charger	Yes
Daisy Chain Compatible	Yes

Battery and Charger Sold Separately



ROCKET™

TOWER LIGHTS

M18™ ROCKET™ LED Tower Light

2130-20

Specifications:

Modes	High, Medium, Low
Lumens	2,000 / 1,300 / 850
Run-Time (XC5.0)	4 hr / 6 hr / 10 hr
Moisture Resistance	IP54
Height	40" Collapsed, 7' Fully Extended

Battery and Charger Sold Separately



M18™ ROCKET™ LED Tower Light/Charger Kit

2135-21HD (2135-20 Tool-Only)

Specifications:

Modes	High, Medium, Low
Lumens	3,000 / 1,700 / 900
Run-Time (XC5.0)	2.25 hr / 4.25 hr / 8 hr
Moisture Resistance	IPX4
Powered By	M18™ or Corded
Head	(3) Independent Multi-Directional
Height	41-1/2" Collapsed, 7' Fully Extended

Includes: (1) M18™ REDLITHIUM™ HIGH DEMAND™ 9.0 Battery Pack, Carrying Bag



CHARGES

M18™ ROCKET™ LED Dual Pack Tower Light w/ ONE-KEY™ Kit

2120-22HD (2120-20 Tool-Only)

Specifications:

Modes	High, Medium, Low
Lumens	5,400 / 3,100 / 1,600
Run-Time (2X HD9.0)	7 hr / 12.5 hr / 26 hr
Moisture Resistance	IP67
Powered By	1 or 2 Batteries
Height	22" Collapsed, 5'5" Fully Extended

Includes: (2) M18™ REDLITHIUM™ HIGH DEMAND™ 9.0 Battery Packs, Rapid Charger, Shoulder Strap



PERSONAL LIGHTING

REDLITHIUM™ USB

USB Rechargeable Hard Hat Headlamp Kit

2111-21

Specifications:

Modes	Spot/Flood, Spot High, Flood High/ Medium/Low
Lumens	475 / 300 / 300, 150, 25
Run-Time (REDLITHIUM™ USB)	2 hr / 4 hr / 4.5 hr, 8.5 hr, 31 hr
Moisture Resistance	IP54
Powered By	REDLITHIUM™ USB
Head	7-Position Tilting Light Head

Includes: (1) REDLITHIUM™ USB Rechargeable Pack, 2 ft Heavy Duty Cord, Hard Hat Clips



USB Rechargeable ROVER™ Pocket Flood Light Kit

2112-21

Specifications:

Modes	High, Low
Lumens	445 / 100
Run-Time (REDLITHIUM™ USB)	2 hr / 11 hr
Moisture Resistance	IP54
Powered By	REDLITHIUM™ USB
Hands Free	Dual Magnet Clip

Includes: (1) REDLITHIUM™ USB Rechargeable Pack, 2 ft Heavy Duty Cord



USB Rechargeable 700L Flashlight Kit

2110-21

Specifications:

Modes	Flood/Spot High, Flood/Spot Low, Strobe
Lumens	700 / 100 / 700
Run-Time (REDLITHIUM™ USB)	4.5 hr / 16 hr / 9 hr
Moisture Resistance	IP67
Powered By	REDLITHIUM™ USB
Structure	6000 Series Aluminum, Type II Anodize Finish

Includes: (1) REDLITHIUM™ USB Rechargeable Pack, 2 ft Heavy Duty Cord



NON-RECHARGEABLES

MILWAUKEE® Pen Light 2105

100 Lumens

POWERED BY AAA x2



MILWAUKEE® Headlamp 2106

300 Max Lumens

POWERED BY AAA x3

